

**Title of the invention**

METHOD FOR RETRIEVING AND DELIVERING MULTIMEDIA MESSAGES USING THE SESSION INITIATION PROTOCOL

**Field of the invention**

- 5 The invention relates to retrieving and delivering of multimedia messages using the Session Initiation Protocol.

**Discussion of background art**

- 10 Multimedia Messaging Service MMS has in its present form been defined in standard 3GPP TS 23.140 "3rd Generation Partnership Project; Technical Specification Group Terminals; Multimedia Messaging Service (MMS); Functional description; Stage 2 (Release 6)". The architecture of the networks involved as well as functions of different modules,
- 15 especially the MMS User Agent and the MMS Relay/Server (below referred to as MMS Server), are described in more detail therein.

- 20 Notifications of incoming MMS messages are delivered from the MMS server to the MMS User Agent by using WAP push. The MMS User Agent sends a WAP or HTTP GET in order to make the MMS server send an MMS message.

- 25 The transfer of Multimedia Messaging Services MMS messages is usually performed using the Wireless Application Protocol WAP or Hypertext Transport Protocol HTTP. Retrieval of an MMS message is then performed by sending a WAP or HTTP GET request, respectively.

- 30 Messaging services implemented for the IP Multimedia core network Subsystem IMS network are currently under discussion in the 3GPP. The IMS messaging services comprise messaging

types immediate messaging, deferred delivery messaging, and session-based messaging. In immediate messaging, a message is delivered immediately from one user to another, whereas in deferred messaging it is delivered as soon as the recipient becomes available. In session-based messaging, a session has to be set up before any other communication can take place.

In the IMS network, the Session Initiation Protocol SIP is used for creating, modifying, and terminating sessions with one or more participants. Two methods defined in the SIP are SUBSCRIBE and NOTIFY. SUBSCRIBE is used by a subscriber terminal to subscribe to event packages at proxies or servers. Whenever an event belonging to the subscribed event package is triggered, the terminal is informed by using the SIP method NOTIFY.

It may be commercially of vital importance to be able to retrieve MMS messages directly from within IMS. This has, nevertheless and in spite of hard work, been impossible until now.

#### Summary of the invention

It is an objective of the invention to bring about new features to the Session Initiation Protocol SIP with which Multimedia Messaging Services MMS messages can be retrieved or delivered using the SIP protocol only.

The object of retrieving MMS messages using the SIP protocol can be achieved with a method according to the independent claim 1, or by using a terminal according to the independent claim 4.

The object of delivering MMS messages using the SIP protocol can be achieved with a method according to the independent claim 5, or by using an MMS server according to the independent claim 8.

5

Dependent patent claims describe various advantageous embodiments of the invention.

#### Advantages of the invention

10 The devices and methods according to the invention enable using the SIP as single transport protocol for retrieving and delivering MMS messages. In this manner, the terminals do not need to have other protocols than SIP supported by their protocol stack, thereby helping to reduce manufacturing cost  
15 of the terminals. Further, because there are less protocols needed in the protocol stack, the probability for errors in the software is reduced, therefore also shortening testing period of the devices, resulting in a shorter time-to-market.

#### 20 Short description of the drawings

In the following, the preferred embodiments of the invention are described in more detail with reference to the accompanying drawings 1 to 4, of which:

25 Figure 1 shows a mobile network comprising also IP Multimedia core network Subsystem;

Figure 2 shows the structure of a new SIP message used for retrieving or delivering an MMS message;

30

Figures 3a and 3b show the structure of two different SIP messages; and

Figure 4 shows messaging (41) used for subscribing an event package, messaging (43) used for notifying a terminal upon receipt of an MMS message, and  
5 messaging (45) used for downloading an MMS message to a subscriber terminal.

#### Detailed description of the invention

Figure 1 shows a terminal 101 within a Radio Access Network RAN 11 of a mobile network 12. The RAN 11 comprises a  
10 plurality of Base Stations BS 103 controlled by a Radio Network Controller RNC 105, the terminal 101 communicating with the mobile network 12 wirelessly via a BS 103. Typically, one mobile network 12 comprises a plurality of RNC 105, but for simplicity Figure 1 shows only one such RNC 105.

15 A terminal 101 has communication means 165, preferably those as commonly used for radio communications, and all related means for enabling a successful communication with the mobile network 12. Within the terminal 101, the processing unit 170  
20 uses the communication means 165 in order to transmit and receive data. Both data to be transmitted and data received are filtered via the protocol stack 175 before any further operations are performed on them. The terminal 101 may have a plurality of applications stored in its memory. These  
25 applications include also an MMS User Agent 180 which takes care of all MMS specific interactions between the home network 14 and the terminal 101. The applications are run in the processing unit 170 and they use data obtained through the communication means 165 and filtered through the protocol  
30 stack 175.

For packet traffic, the mobile network 12 comprises a Serving GPRS Support Node SGSN 107 and Gateway GPRS Support Node GGSN 109. The terminal 101 obtains an IP address which is reserved up to the GGSN 109. The traffic between the terminal 101 and  
5 the GGSN 109 goes then on the GPRS Tunneling Protocol GTP protocol layer through the SGSN 107 and the RAN 11, wherein there are further specific radio interface layer protocols facilitating resource-efficient data transport over the air interface. As the skilled person appreciates, a more detailed  
10 description of the related protocols can be found in any of the various standards defining these mechanisms.

The terminal 101 may be roaming under mobile network 12 even though its home network 14 were elsewhere. The transmission  
15 of packet data is then performed either directly between the terminal 101 and its home network 14 or via any other network, especially the Internet 13.

The home network 14 comprises a Home Service Server HSS 115  
20 which includes subscriber data and knows under which mobile network 12 the terminal 101 is roaming. A Serving Call State Control Function S-CSCF 113 is located in the home network 14 of the terminal 101. If the terminal 101 is roaming under another mobile network 12, then the S-CSCF 113 of home  
25 network 14 is used via a Proxy Call State Control Function P-CSCF 111. The P-CSCF 111 includes data about services subscribed for the terminal 101; this data has been transmitted from the S-CSCF 113 to the P-CSCF 111 as a response to a query sent by the P-CSCF 111.

30

In mobile telecommunication systems, such as in GSM and UMTS, the SIP is used for the IP multimedia core network Subsystem IMS. The IMS includes P-CSCF 111, S-CSCF 113, and servers

providing some of the services. Especially for MMS messages, MMS server 130 is used as the server providing all MMS related services.

5 The MMS server 130 comprises communication means 185 for communication between terminals 101, with other MMS servers 130, and with servers in the Internet 13. The processing unit 190 of the MMS server 130 uses the communication means 185 as well as the protocol stack 195. The protocol stack 195  
10 comprises IMS protocols enabling provision of different services. The protocol stack 195 may further comprise an MMS specific part. The MMS server 130 is running an MMS application 196 which takes care of registering event packet subscriptions, notifying subscriber terminals of received MMS  
15 messages belonging to a subscribed event packet, and delivering MMS retrievals in response to receiving MMS retrieval requests.

Figure 2 shows the structure of the MMS part of the new SIP  
20 messages 20 used for subscribing an event package, or retrieving or delivering an MMS message. The SIP message 20 comprises fields 21 (X-Mms\_Message-Type), 22 (X-Mms-Transaction ID), 23 (X-Mms-MMS Version), 24 (To), and 25 (From). These fields 21 to 25 are usually carried in the  
25 header of the SIP message 20.

Figures 3a and 3b show the structures of two different SIP messages 20. The SIP message 20a used for carrying MMS subscription request message M401 is shown in Figure 3a and  
30 comprises in its field 21 identifier "m-sreq" and further in field 36A flag "yes". The SIP message 20b used for carrying MMS subscription response message M403 is shown in Figure 3b

and comprises in field 21 identifier "m-sref", and further an acknowledgement "OK" in field 36B.

The skilled person appreciates that the examples shown in  
5 Figures 2, 3a, and 3b are schematic of their nature. More  
detailed description for all header and message formats can  
be found in IETF specifications RFC 3261 and 3265. RFC 3261  
introduces the SIP and RFC 3265 introduces the SIP-Specific  
Event Notification. Both of these specifications define also  
10 the SIP methods later referred to in this description.

Dashed box 41 in Figure 4 shows how an event package is  
subscribed. The MMS User Agent 180 requests by sending MMS  
subscription request M401 to the MMS Server 130 that the MMS  
15 Server 130 uses a SIP method NOTIFY for sending MMS  
notifications. MMS subscription request M401 has a form of  
message 20b shown in Figure 3b, and it is sent by the  
terminal 101 as soon as it has been switched on for the first  
time and has network coverage. The MMS subscription request  
20 M401 is acknowledged by the MMS Server 130 with an MMS  
subscription response M403.

Dashed box 43 shows how the terminal 101 is informed upon  
receipt of MMS message N404. As soon as the MMS Server 130  
25 receives the MMS message N404 which belongs to a subscribed  
event package, it sends MMS notification M405 to the MMS User  
Agent 180 informing it that the MMS message N404 has arrived  
at the MMS Server 130. The MMS User agent 180 responds to MMS  
notification M405 with MMS notification response M407.

30

Dashed box 45 shows how the MMS message N404 received by the  
MMS Server 130 can be downloaded to the terminal 101. In  
response to the MMS notification M405, the MMS User Agent 180

can decide to download the MMS message N404 by sending an MMS message retrieval request M409 to the MMS Server 130. MMS message retrieval request M409 is a SIP FETCH message.

- 5 In response to receiving MMS message retrieval request M409 the MMS Server 130 sends MMS message retrieval M411 to the MMS Server 130. MMS message retrieval M411 includes the contents of MMS message N404.
- 10 The MMS User Agent 180 acknowledges the receipt of the MMS message retrieval M411 by returning MMS message retrieval acknowledgement M413. In response to receiving MMS message retrieval acknowledgement M413 the MMS Server 130 responds with acknowledgement M417.
- 15 MMS subscription request M401; MMS subscription response M403; MMS notification M405; MMS notification response M407; MMS message retrieval request M409; MMS message retrieval M411; and MMS message retrieval acknowledgement M413 all have
- 20 structures similar to those shown in Figures 3a and 3b except that the value in field 21 is changed accordingly to identify the kind of the message. The structure of these messages is otherwise as defined in 3GPP, TS 23.140 already referred above.
- 25 Messages M401 to M417 communicated between the terminal 101 and the MMS Server 130 are routed via BS 103, SGSN 107, GGSN 109, P-CSCF 111, and S-CSCF 113, if necessary.
- 30 For MMS subscription request M401 the header field "event" is set to value "mms" identifying the purpose of the MMS subscription request M401, i.e. that the MMS User Agent 180



requests the MMS Server 130 to use the SIP method notify for sending MMS notifications M405.

As in MMS subscription request M401, also in MMS notification  
5 M405 the header field "event" is set to value "mms", this informing the terminal 103 about the incoming MMS notification in MMS notification M405.

Messages M401 to M417 comprise SIP-specific header fields and  
10 MMS level header fields.

The MMS subscription request M401 is sent using the SIP method SUBSCRIBE. The MMS subscription request M401 comprises an event identifier defining that the SIP method NOTIFY is to  
15 be used for sending MMS notifications M405. After receiving an MMS notification M405, the terminal 101 generates and sends an MMS message retrieval request M409

In the first embodiment, the MMS level header fields are  
20 added to the header fields in the messages M401 to M417. Then the S-CSCF 113 analyses the SIP headers of each incoming message. If any MMS-specific headers is detected, for example by detecting a keyword "X-Mms-" in the fields, the S-CSCF 113 routes the message to the MMS Server 130. Similarly, all SIP  
25 messages received by the terminal 101 are checked for any MMS-specific headers, and if any is found, the message is passed to the MMS User Agent 180. An advantage of such a header structure is that all both SIP and MMS headers have a similar format and coding. In particular for a SIP-only  
30 terminal this reduces the implementation effort since a single coding scheme can be applied to the SIP protocol stack as well as to the application level.

In the second embodiment, the header fields of the SIP messages comprise SIP-specific header fields only. In this approach the MMS information is an attachment of the SIP message. The S-CSCF 113 checks if the attachment is an MMS message. If in the header field "Content-Type:" a keyword "application/vnd.wap.mms-message" is detected, this is most probably the case, and the message is then routed to the MMS Server 130. The header field "Content-Type:" of SIP messages received by the terminal 101 is in the same manner checked.

10 If the header field comprises "application/vnd.wap.mms-message". The SIP message is passed to the MMS User Agent 180. An advantage of such a header structure and encoding is that in this manner a better compatibility with currently existing MMS systems can be achieved. In particular,

15 terminals comprising a current MMS client software which is only ported to a SIP protocol stack, no extra encoder or decoder for processing the messages M401 to M417 is needed therefore making it easier to implement a terminal 101 supporting MMS functionalities.

20 Some of the acknowledgement messages, i.e. MMS subscription response M403, MMS notification response M407, and MMS message retrieval M411 are 200 OK messages. Further, they comprise relevant MMS headers, and MMS message retrieval M411

25 further includes the MMS message N404 received by the MMS Server 130. All these acknowledgement messages may either comprise SIP-specific header fields or in addition to the SIP-specific header fields also some MMS-specific header fields. In the former case the other data necessary is embedded in

30 the payload.

The other acknowledgement messages, i.e. MMS message retrieval acknowledgement M413 and acknowledgement M417 are

200 OK messages too. Contrary to other 200 OK messages described above, they comprise no MMS-specific information.

**List of used reference numerals**

- 11 Radio Access Network RAN
- 5 12 mobile network
- 14 home network
- 101 terminal
- 103 Base Station BS
- 105 Radio Network Controller RNC
- 10 107 Serving GPRS Support Node SGSN
- 109 Gateway GPRS Support Node GGSN
- 111 Proxy-Call State Control Function P-CSCF
- 113 Serving Call State Control Function S-CSCF
- 115 Home Service Server HSS
- 15 130 MMS Server
- 165 communication means
- 170 processing unit
- 175 protocol stack
- 180 MMS User Agent
- 20 185 communication means
- 190 processing unit
- 195 protocol stack
- 196 MMS application

## Claims

1. A method for retrieving an MMS message (N404), to be executed at an MMS User Agent (180), comprising the steps of:

- 5       - generating an MMS subscription request (M401);
- sending said MMS subscription request (M401) to an MMS server (130);
- receiving an MMS notification (M405) of an MMS message (N404) from the MMS server (130);
- 10       - in response to receiving said MMS notification (M405), generating an MMS message retrieval request (M409) for retrieving said MMS message (N404);
- sending said MMS message retrieval request (M409) to the MMS Server (130);
- 15       - receiving an MMS message retrieval (M411) comprising said MMS message (N404); and
- in response to receiving said MMS message retrieval (M411) from the MMS Server (130), sending an
- 20       acknowledgment (M413) to the MMS Server (130);

wherein the improvement consists of:

- said MMS subscription request (M401) is sent using a SIP method SUBSCRIBE;
- said MMS notification (M405) is received using a SIP
- 25       method NOTIFY;
- said MMS message retrieval request (M409) is sent using a SIP method FETCH; and
- said acknowledgment (M413) is sent using a SIP method INFORM.

30

2. A method according to claim 1, wherein: MMS specific header fields of said MMS subscription request (M401), said MMS notification (M405), said MMS message retrieval

request (M409), and said acknowledgment (M413) are sent or received as attachments.

3. A method according to claim 1, wherein: MMS specific  
5 header fields of said MMS subscription request (M401),  
said MMS notification (M405), said MMS message retrieval  
request (M409), and said acknowledgment (M413) are  
included into SIP header fields.
4. A terminal (101) comprising: means (165, 170, 175, 180)  
10 adapted to carry out the method of claim 1, 2, or 3.
5. A method for delivering an MMS message (N404), to be  
executed at an MMS Server (130), comprising the steps of:
- receiving an MMS subscription request (M401) from a  
terminal (101);
  - 15 - receiving an MMS message (N404);
  - in response to receiving said MMS message (N404),  
generating an MMS notification (M405), and sending said  
MMS notification (M405) to the terminal (101);
  - receiving an MMS message retrieval request (M409) from  
20 the terminal (101) for retrieving the MMS message  
(M404);
  - in response to receiving said MMS message retrieval  
request (M409), generating an MMS message retrieval  
(M411) comprising the MMS message (N404), and sending  
25 said MMS message retrieval (M411) to the terminal (101);  
and
  - receiving an acknowledgment (M413) from the terminal  
(101),
- wherein the improvement consists of:
- 30 - said MMS subscription request (M401) is received using a  
SIP method SUBSCRIBE;
  - said MMS notification (M405) is sent using a SIP method  
NOTIFY;

15

- said MMS message retrieval request (M409) is received using a SIP method FETCH; and
- said acknowledgment (M413) is received using a SIP method INFORM.

5


6. A method according to claim 5, wherein: MMS specific header fields of said MMS subscription request (M401), said MMS notification (M405), said MMS message retrieval request (M409), and said acknowledgment (M413) are  
10 received or sent as attachments.

7. A method according to claim 5, wherein: MMS specific header fields of said MMS subscription request (M401), said MMS notification (M405), said MMS message retrieval  
15 request (M409), and said acknowledgment (M413) are included into SIP header fields.

8. An MMS server (130) **comprising:** means (185, 190, 195, 196) adapted to carry out the method steps of claim 5, 6, or 7.

1/3

FIG 1

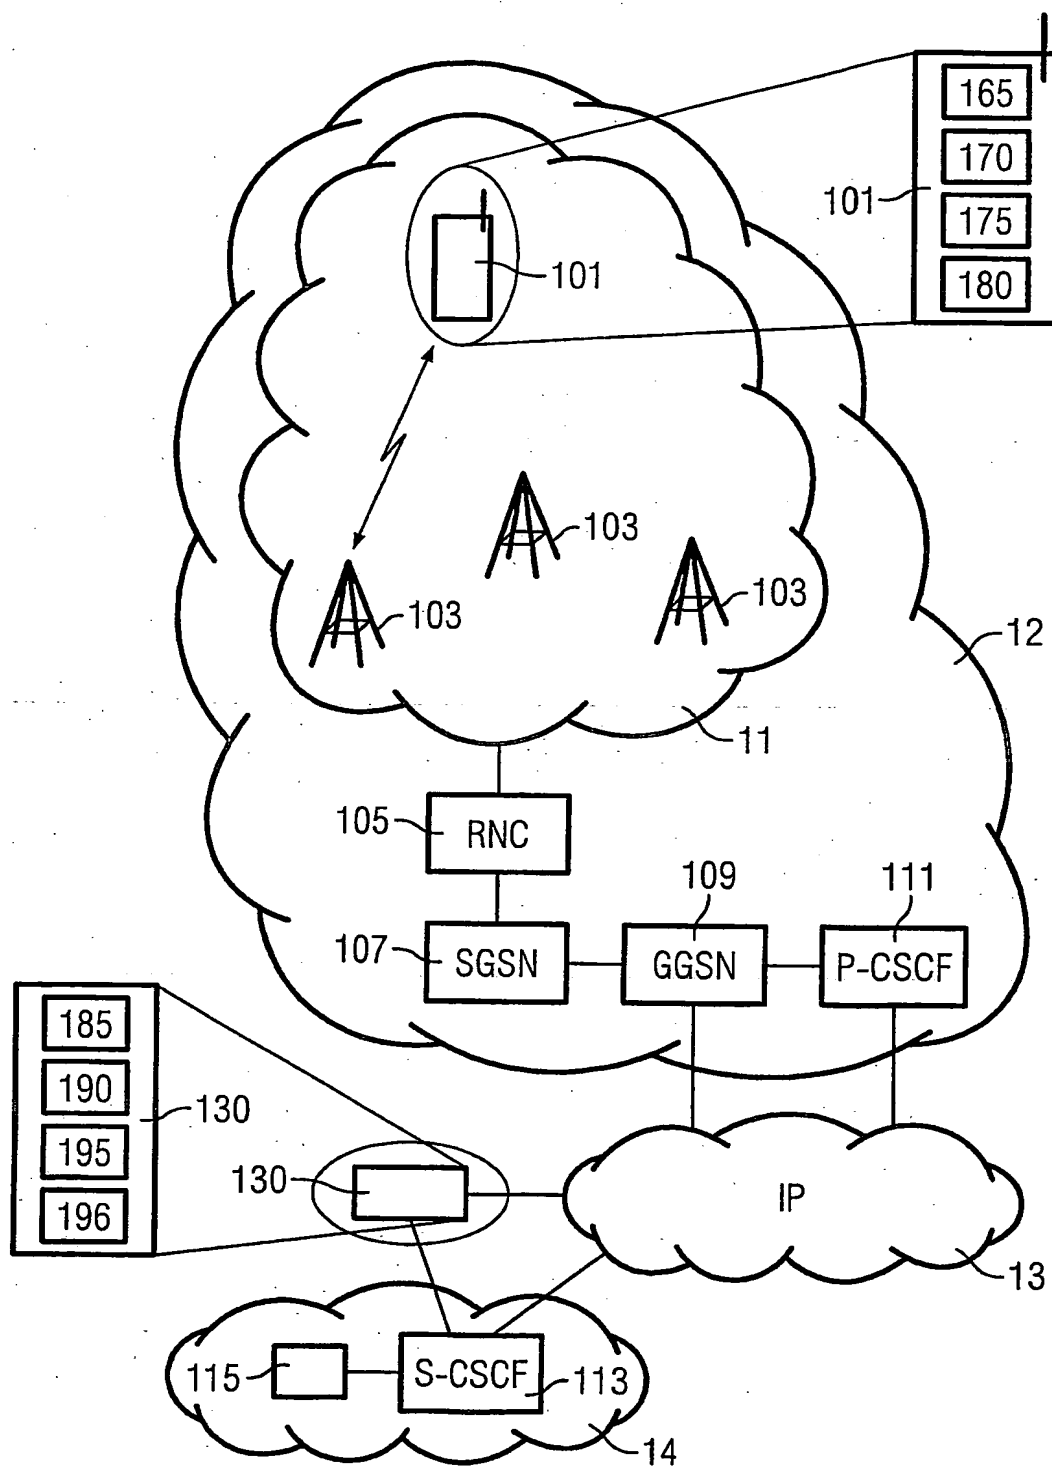



2/3

FIG 2

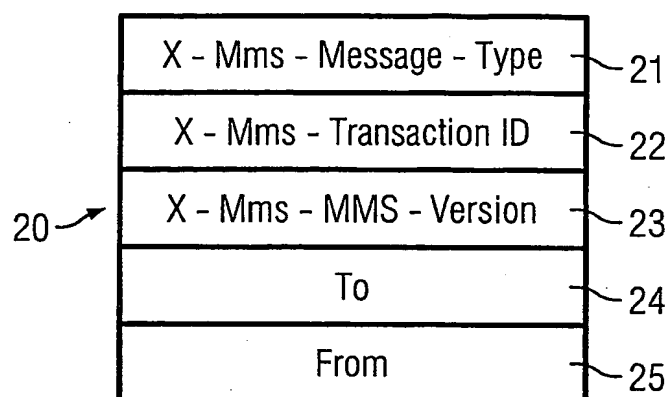


FIG 3A



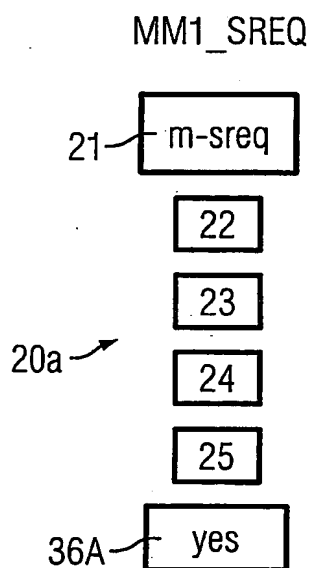


FIG 3B

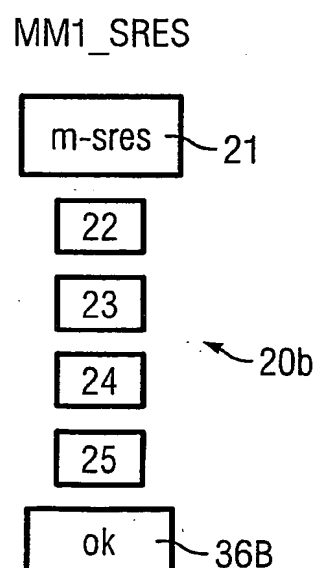

3/3

FIG 4

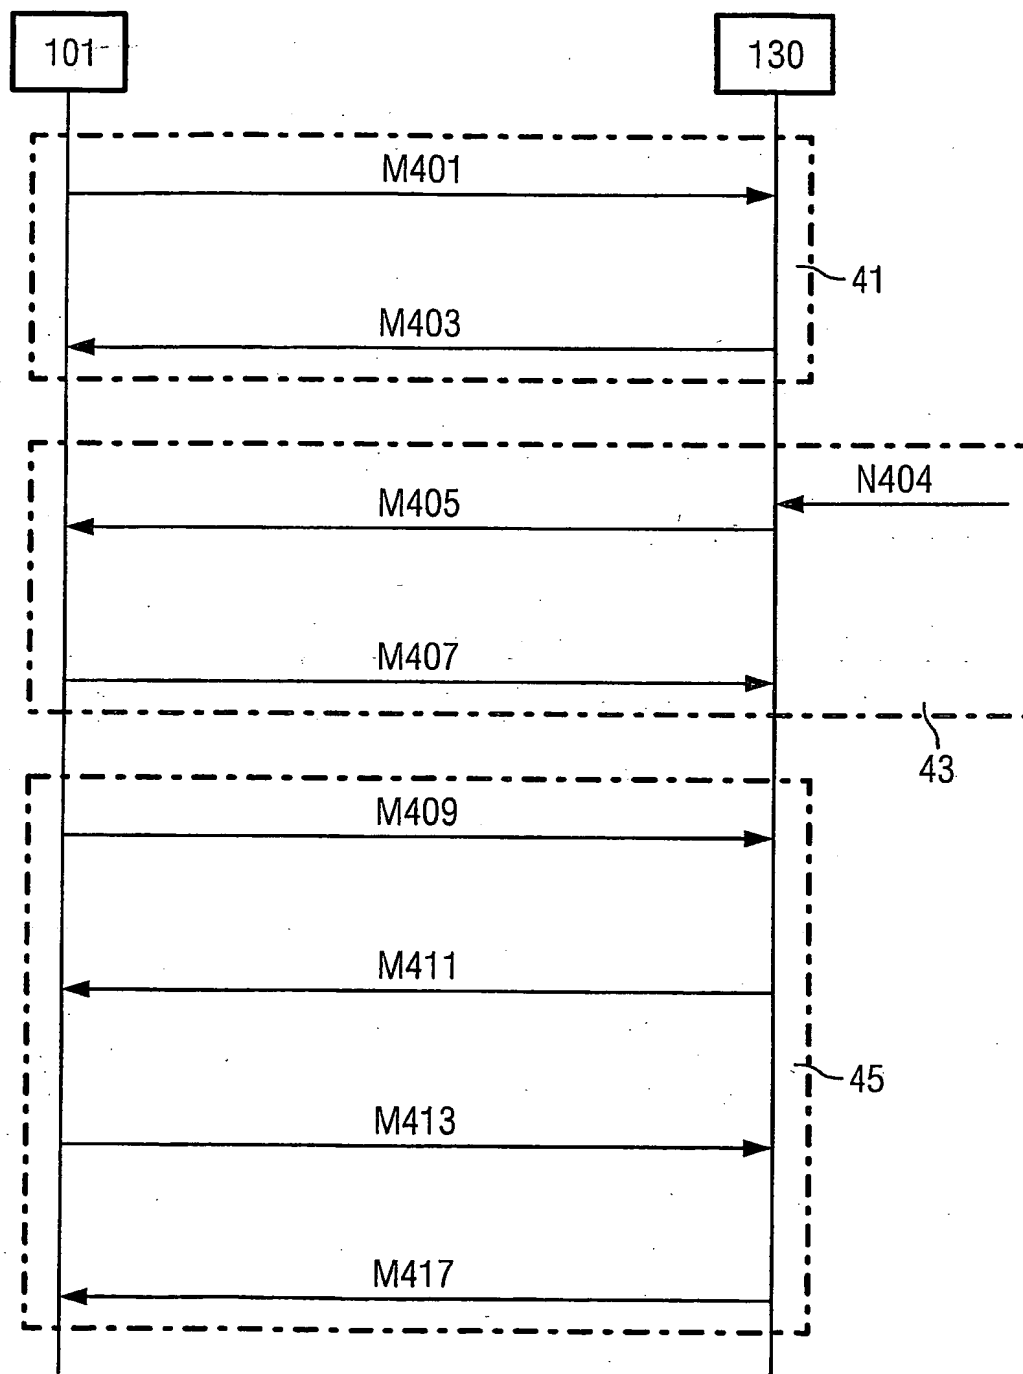

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/12439

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04M3/42 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/062026 A (LAUMEN JOSEF ; SCHMIDT ANDREAS (DE); SCHMIDT GUNNAR (DE); SIEMENS AG ( ) 8 August 2002 (2002-08-08) page 2, line 13 - page 4, line 11	1-8
A	WO 02/063838 A (JERBI BELHASSEN ; LAUMEN JOSEF (DE); SCHMIDT ANDREAS (DE); SIEMENS AG) 15 August 2002 (2002-08-15) page 2, line 11 - page 5, line 7 ----- -/-	1-8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*8\* document member of the same patent family

Date of the actual completion of the International search

29 June 2004

Date of mailing of the International search report

06/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Gkell, M

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/12439

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"ETSI TS 122 140 V5.2.0; Universal Mobile Telecommunications System (UMTS); Service aspects; Stage 1; Multimedia Messaging Service (3GPP TS 22.140 version 5.2.0 Release 5)" ETSI TS 123 140 V5.2.0, XX, XX, June 2002 (2002-06), pages 1-15, XP002225280 the whole document</p>	1-8
A	<p>"Universal Mobile Telecommunications System (UMTS); Multimedia Messaging Service (MMS), Functional description; Stage 2 (3GPP TS 23.140 version 4.2.0 Release 4)" ETSI TS 123 140 V4.2.0, XX, XX, March 2001 (2001-03), XP002180514 the whole document</p>	1-8

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/12439

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02062026	A	08-08-2002	DE 10103799 A1	08-08-2002
			WO 02062026 A1	08-08-2002
			EP 1356644 A1	29-10-2003
			US 2004071136 A1	15-04-2004
WO 02063838	A	15-08-2002	DE 10142270 A1	08-08-2002
			WO 02063838 A2	15-08-2002
			EP 1358742 A2	05-11-2003
			US 2004057403 A1	25-03-2004